


RCCB TYPE DCR

Residual Current Circuit Breaker IEC/EN 61008-1 (RCCB)

Feature

DCR are available with ratings up to 100A and sensitivities 30mA, 100mA & 300mA time delayed. accordance with IEC/EN61008 10kA. cable size up to 50mm². The DCR devices will trip to a central position under earth fault condition, Positive contact indicators by flag- Green Open, Redclosed, indication of trip by separate oval indicator - Yellow, Voltage 240/415V, Frequency 50/60Hz, connection by cable or busbar, IP rating is IP20, Mounting is Din rail 35 mm.

Marking

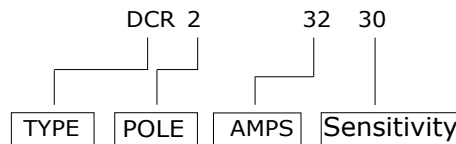

Type DCR IEC/EN61008 Residual Current Circuit Breakers 30mA Type AC.

Rating	Ref.No.	2 Pole	Ref.No.	4 Pole	Sensitivity
25	W601054	DCR22530	W601059	DCR42530	30
40	W601055	DCR24030	W601060	DCR44030	30
63	W601056	DCR26330	W601061	DCR46330	30
80	W601057	DCR28030	W601062	DCR48030	30
100	W601058	DCR210030	W601063	DCR410030	30

Type DCR IEC/EN61008 Residual Current Circuit Breakers 100mA Type AC.

Rating	Ref.No.	2 Pole	Ref.No.	4 Pole	Sensitivity
25	W601064	DCR225100	W601069	DCR425100	100
40	W601065	DCR240100	W601070	DCR440100	100
63	W601066	DCR263100	W601071	DCR463100	100
80	W601067	DCR280100	W601072	DCR480100	100
100	W601068	DCR2100100	W601073	DCR4100100	100

Option Type "A" Available


RCCB TYPE DCR

Residual Current Circuit Breaker IEC/EN61008-1 (RCCB)

Type DCR IEC/EN61008 Residual Current Circuit Breakers 300mA Type AC.

Rating	Ref.No.	2 Pole	Ref.No.	4 Pole	Sensitivity
25	W601074	DCR225300	W601079	DCR425300	300
40	W601075	DCR240300	W601080	DCR440300	300
63	W601076	DCR263300	W601081	DCR463300	300
80	W601077	DCR280300	W601082	DCR480300	300
100	W601078	DCR2100300	W601083	DCR4100300	300

Dimensions

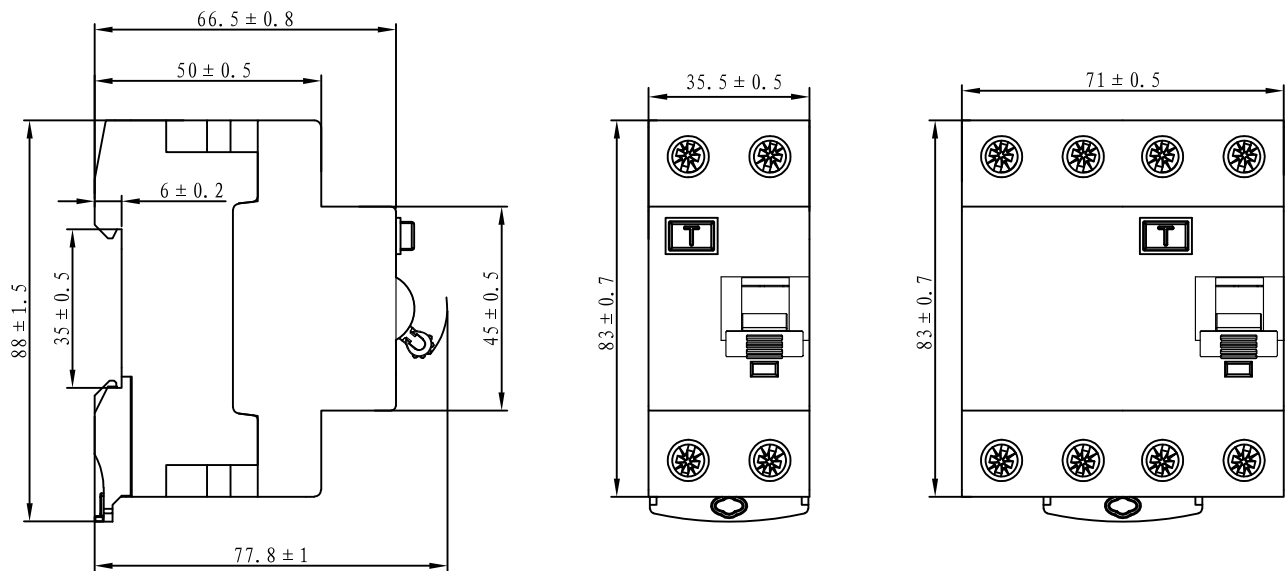

Option Type "A" Available