

MCB TYPE DNB

DIN-Rail IEC/EN 60947-2 Circuit Breakers 10kA, IEC/EN 60898-1 6kA (240V/415V)

Feature

DNB-MCBs are available with a breaking capacity of IEC/EN 60947-2 10kA, IEC/EN 60898-1 6kA. The MCB are calibrated to 40°C MCBs can be supplied with 50°C ambient calibration.


Voltage 240/415V, Frequency 50/60Hz.

To order insert at the end of MCB list number: DNB1C63H ref. W600881.

Description

Protection and control of circuits against overloads & short circuits for domestic and industrial installations.

Marking

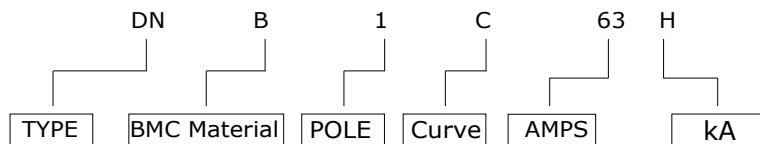

DNB IEC/EN 60947-2 Circuit Breakers 10kA, IEC/EN 60898-1 6kA (240V/415V) Curve C

Rating	Ref.No.	1Pole	Ref.No.	2Pole	Ref.No.	3Pole	Ref.No.	4Pole
63	W600882	DNB1C063H	W600886	DNB2C063H	W600890	DNB3C063H	W600894	DNB4C063H
80	W600883	DNB1C080H	W600887	DNB2C080H	W600891	DNB3C080H	W600895	DNB4C080H
100	W600884	DNB1C100H	W600888	DNB2C100H	W600892	DNB3C100H	W600896	DNB4C100H
125	W600885	DNB1C125H	W600889	DNB2C125H	W600893	DNB3C125H	W600897	DNB4C125H

DNB IEC/EN 60947-2 Circuit Breakers 6kA, IEC/EN 60898-1 6kA (240V/415V) Curve C


Rating	Ref.No.	1Pole	Ref.No.	2Pole	Ref.No.	3Pole	Ref.No.	4Pole
63	W600898	DNB1C063S	W600902	DNB2C063S	W600906	DNB3C063S	W600910	DNB4C063S
80	W600899	DNB1C080S	W600903	DNB2C080S	W600907	DNB3C080S	W600911	DNB4C080S
100	W600900	DNB1C100S	W600904	DNB2C100S	W600908	DNB3C100S	W600912	DNB4C100S
125	W600901	DNB1C125S	W600905	DNB2C125S	W600909	DNB3C125S	W600913	DNB4C125S

MCB TYPE DNB

DIN-Rail IEC/EN 60947-2 Circuit Breakers 10kA, IEC/EN 60898-1 6kA (240V/415V)


Dimensions

FRONT VIEW

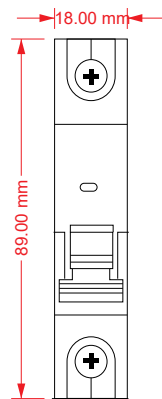

1 Pole

FRONT VIEW

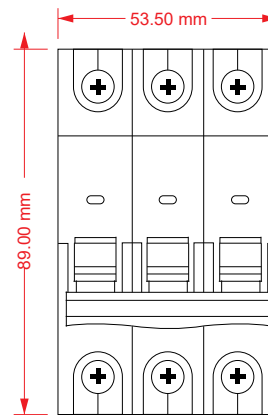

3 Pole

SIDE VIEW

