

17.5mm DIN Rail Timer WT642XA



DIN 17.5mm

Display Specifications

LED Indications	Power ON, Relay ON
-----------------	--------------------

Input Specifications

Accuracy	Setting : $\pm 5\%$ of F.S. Repeat : $\pm 0.5\%$ or 50msec (F.S. = Full Scale)
----------	---

Output Specifications

Relay Contact	1 C/O SPDT
Contact Rating	5A @ 250V AC or 24V DC

Functional Specifications

Modes	ON delay / Interval
Time Ranges	0 - 3sec / min 0 - 10sec / min 0 - 30sec / min 0 - 60sec / min
Resolution	0.3sec
Reset	On power interruption Reset time < 100 msec

Auxiliary Supply Specifications

Supply Voltage	20V to 240VAC, 12V to 240 VDC
Power Consumption	6VA max

Environmental Specifications

Temperature	Operating : 0 to 50°C (32 to 122°F) Storage : -20 to 75°C (-4 to 167°F)
Humidity (non - condensing)	95% RH

Mechanical Specifications

Mounting	DIN Rail Mount
Weight	115gms


Ordering Information

Product Code	Ref.No.	Supply Voltage
WT642XA	W605506	20V to 240V AC, 12V to 240V DC


Features :

- * ON delay / Interval
- * Dual Supply Voltage
- * LED Indications : Power ON, Relay ON
- * Finger Safe Terminals

Dimensions

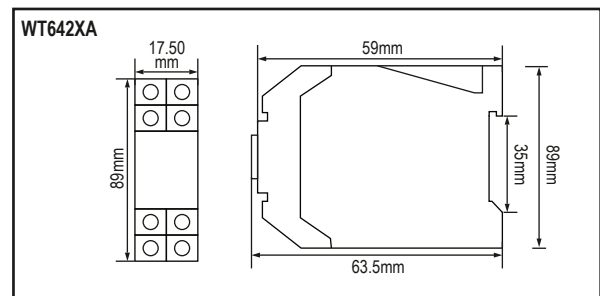

Terminal Connections

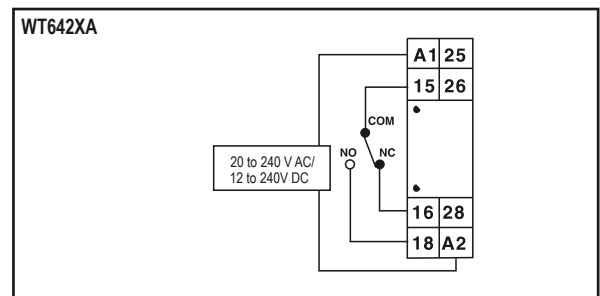

Timing Diagram

