


RCBO TYPE CNO

RCBO's Residual Current Operated Circuit Breaker 6kA, 10kA IEC/EN61009-1 with Over Current Protection

Feature

CNO are available with ratings up to 40A 6kA, 10kA and sensitivities 10mA, 30mA, 100mA & 300mA time delayed. accordance with IEC/EN61009-1. cable size up to 50mm². The CNO devices will trip to a central position under earth fault condition, Positive contact indicators by flag- Green-Open, Red closed, indication of trip by separate oval indicator - Yellow, Voltage 240/415V, Frequency 50/60Hz, connection by cable or busbar, IP rating is IP20, Mounting is Din rail 35 mm.

Marking

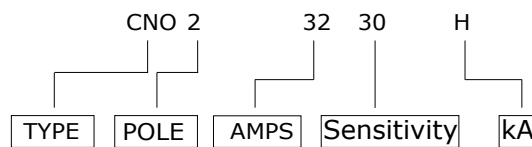

CNO 2Pole 6kA, IEC/EN61009-1 Residual Current Circuit Breakers 10mA Type AC Curve C .

Rating	Ref.No.	2 Pole	Sensitivity
10	W605954	CNO21010S	10
16	W601084	CNO21610S	10
20	W601085	CNO22010S	10
25	W601086	CNO22510S	10
32	W601087	CNO23210S	10
40	W601088	CNO24010S	10

CNO 2Pole 6kA, IEC/EN61009-1 Residual Current Circuit Breakers 30mA Type AC Curve C.

Rating	Ref.No.	2 Pole	Sensitivity
10	W605955	CNO21030S	30
16	W601089	CNO21630S	30
20	W601090	CNO22030S	30
25	W601091	CNO22530S	30
32	W601092	CNO23230S	30
40	W601093	CNO24030S	30

Option Type "A" Available

MCB TYPE CNO

RCBO's Residual Current Operated Circuit Breaker 6kA, 10kA IEC/EN61009-1 with Over Current Protection

1

Miniature Circuit Breakers

CNO 2 Pole 6kA, IEC/EN61009-1 Residual Current Circuit Breakers 100mA Type AC Curve C.

Rating	Ref.No.	2 Pole	Sensitivity
10	W605956	CNO210100S	100
16	W601094	CNO216100S	100
20	W601095	CNO220100S	100
25	W601096	CNO225100S	100
32	W601097	CNO232100S	100
40	W601098	CNO240100S	100

CNO 2 Pole 10kA, IEC/EN61009-1 Residual Current Circuit Breakers 10mA Type AC Curve C.

Rating	Ref.No.	2 Pole	Sensitivity
10	W605958	CNO21010H	10
16	W605643	CNO21610H	10
20	W605644	CNO22010H	10
25	W605645	CNO22510H	10
32	W605646	CNO23210H	10
40	W605647	CNO24010H	10

CNO 2 Pole 10kA, IEC/EN61009-1 Residual Current Circuit Breakers 30mA Type AC Curve C.

Rating	Ref.No.	2 Pole	Sensitivity
10	W605959	CNO21030H	30
16	W605648	CNO21630H	30
20	W605649	CNO22030H	30
25	W605650	CNO22530H	30
32	W605651	CNO23230H	30
40	W605652	CNO24030H	30

Option Type "A" Available

MCB TYPE CNO

RCBO's Residual Current Operated Circuit Breaker 6kA, 10kA IEC/EN61009-1 with Over Current Protection

CNO 2 Pole 10kA, IEC/EN61009-1 Residual Current Circuit Breakers 100mA Type AC Curve C.

Rating	Ref.No.	2 Pole	Sensitivity
10	W605960	CNO210100H	100
16	W605653	CNO216100H	100
20	W605654	CNO220100H	100
25	W605655	CNO225100H	100
32	W605656	CNO232100H	100
40	W605657	CNO240100H	100

Dimensions

