

# 17.5 mm DIN Under Voltage Timer Relay WVTR642-3



## Features:

- Slim space saving design
- Din rail / screw mounting
- Finger guards for safety

Size: DIN 17.5mm

## Technical Specifications

### Input Specifications

Accuracy	Setting: $\pm 5\%$ of Full Scale Repeat: $\pm 0.5\%$ or 50 ms
Reset	On interruption of power; Reset time < 200 msec

### Output Specifications

Output Contact	1 C/O (SPDT)
Contact Rating	5A @ 230V AC / 24V DC, resistive

### Functional Specifications

Modes	Under voltage time relay ( ON delay )
Time Ranges	5 to 15 min
LED Indications	Power ON, Relay ON


### Supply Voltage

Supply Voltage	1 $\emptyset$ /2W 180 - 270V AC (L-N) 50/60Hz 3 $\emptyset$ /4W 380 - 415VAC (L-L) 50/60Hz
----------------	-----------------------------------------------------------------------------------------------

### Environmental Specifications


Temperature	Operating: 0 to 50°C Storage: -20 to 75°C
Humidity (non-condensing)	95% RH
Weight	60 gms

## Dimensions

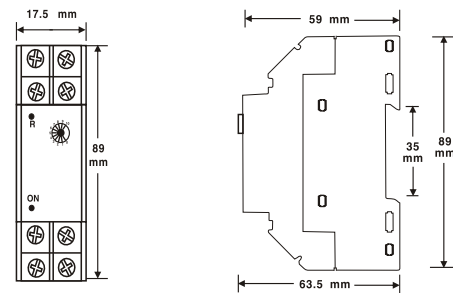

Symmetrical 35mm Din Rail (EN50022) Mounting

## Terminal Connections

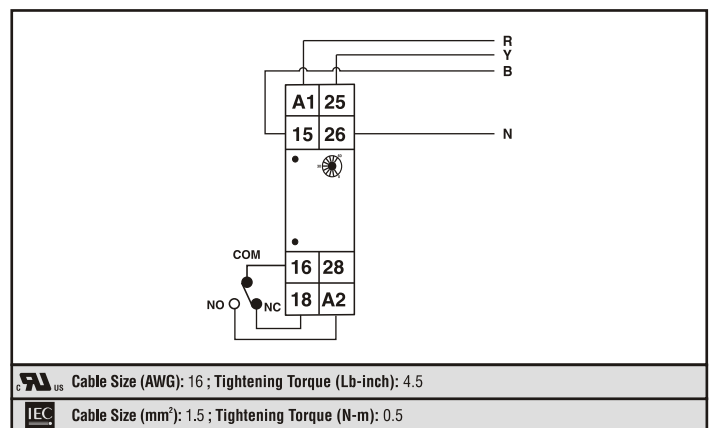

## Ordering Information

This product is available in certified (UL and CE) as well as in non-certified (without UL/CE marking) types. Please order as per the requirement.

Product Code	Ref.No.	Supply Voltage
WVTR642-1	W606177	1 $\emptyset$ /2W 180 - 270V AC (L-N) 50/60Hz
WVTR642-3	W606178	3 $\emptyset$ /4W 380 - 415VAC (L-L) 50/60Hz