

# 17.5mm DIN Rail Timer

## WT642SQ-A



Size: DIN 17.5mm

### Features:

- ON Delay / Interval
- Dual Supply Voltage
- LED Status Indicator: Power ON, Relay ON
- DIN Rail / Back Panel Mount
- Finger Safe Terminals

### Technical Specifications

#### Input Specifications

Accuracy	Setting: $\pm 5\%$ of F.S. Repeat: $\pm 0.5\%$ or 50 msec (F.S. = Full Scale)
Reset	On interruption of power; Reset time < 100 msec

#### Output Specifications

Output Contact	SPDT (1 C/O)
Contact No/Nc	5A/3A 250V AC / 24V DC

#### Functional Specifications

Modes	ON delay / Interval
Time Ranges	0 - 3 sec / min 0 - 10 sec / min 0 - 30 sec / min 0 - 60 sec / min


#### Supply Voltage

Supply Voltage	A1, A2 230VAC, 150/60Hz 25(+), A2(-) 24 AC/DC, -15 to +10%
Power Consumption	6VA max


#### Environmental Specifications

Temperature	Operating: 0 to 50°C (32 to 122°F) Storage: -20 to 75°C (-4 to 167°F)
Humidity (non-condensing)	95% RH
Weight	115 gms (0.220 lbs)

### Dimensions

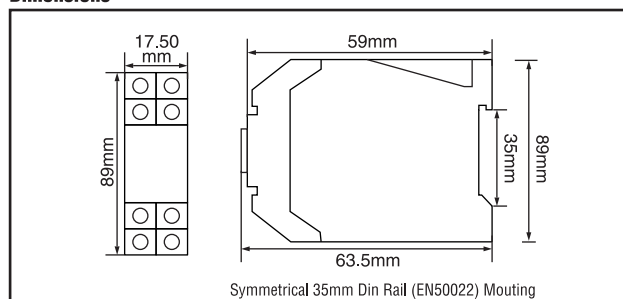

### Terminal Connections

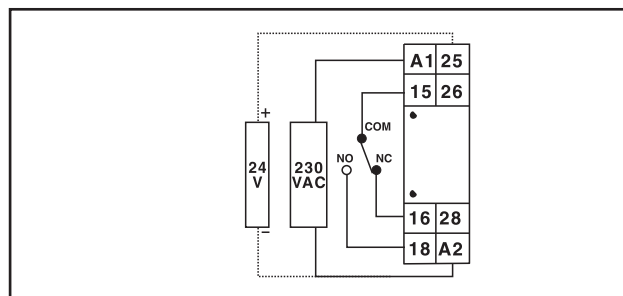

### Ordering Information

Part No.	Ref.No	Supply Voltage
WT642SQ-A	W605505	230V AC

### Timing Diagram

