

17.5mm DIN Rail Timer WT600ST



Technical Specifications

Input Specifications

Accuracy	Setting: $\pm 5\%$ of F.S. Repeat: $\pm 0.5\%$ (F.S. = Full Scale)
Reset	Reset time < 100 msec

Output Specifications

Output Contact	SPDT (1 C/O)
Contact Rating	NO/5A, NC/3A@250V AC

Functional Specifications

Modes	On delay
Time Ranges	0.1 - 1 sec, 0.3 - 3 sec, 1 - 10 sec, 3 - 30 sec 0.1 - 1 min, 0.3 - 3 min, 1 - 10 min, 3 - 30 min 0.1 - 1 hr, 0.3 - 3 hr

Supply Voltage

Supply Voltage	240V AC (AC : 50 / 60Hz) 110V AC (AC : 50 / 60Hz) 24V AC/DC (AC : 50 / 60Hz)
----------------	--

Environmental Specifications

Temperature	Operating: 0 to 50°C (32 to 122°F) Storage: -20 to 75°C (-4 to 167°F)
Humidity (non-condensing)	95% RH
Weight	61 gms
Protection Level	IP40 for Casing IP20 for terminals


Features:

- On Delay
- 10 Time Ranges
- Front knobs for Time Range & Time Scale
- Slim, Space Saving Design
- DIN Rail Mount

Size: DIN 17.5mm


Certifications:

Dimensions

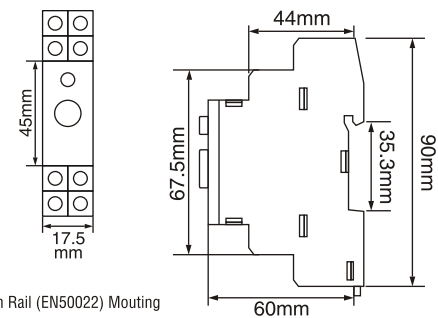


Symmetrical 35mm Din Rail (EN50022) Mounting

Terminal Connections

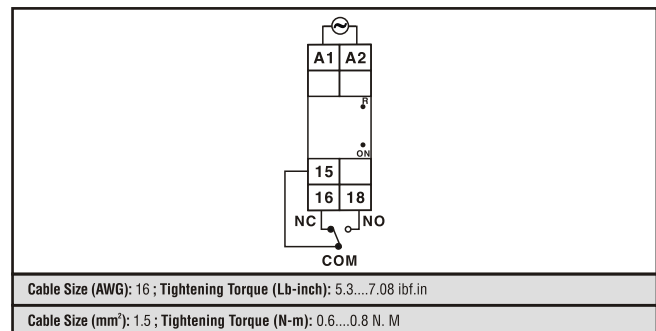

Timing Diagram

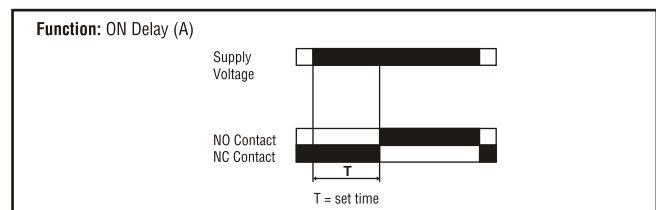

Ordering Information

Part No.	Supply Voltage			Ref.No.	Certification
	240V AC	110V AC	24V AC/DC		
WT600ST	■			W605496	■
WT600ST-CU	■			W605497	■
WT600ST-110-CU		■		W605498	■
WT600ST-24-CU			■	W605499	■