

RCBO Type RQP

Plug-in RCBO IEC/EN 61009-1 10kA (240V/415V)


Feature

RQP-RCBOs are available with a breaking capacity of IEC/EN 61009-1 The RCBO are calibrated to 40°C and can be supplied with 50°C ambient calibration Type AC.^①

Voltage 240/415V, Frequency 50/60Hz.

To order insert at the end of RCBO list number: RQP10630H ref. W600594.

Marking

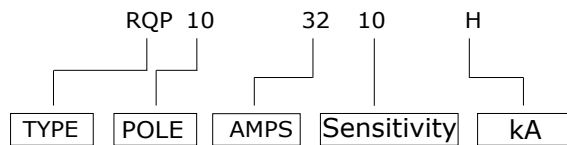

RQP Electronic Combined RCBO/MCB Device, 10kA 1Pole 240V, 10mA Type AC Curve C

Rating	Ref.NO.	1 Pole	Sensitivity
6	W600594	RQP10610H	10
10	W600595	RQP11010H	10
16	W600596	RQP11610H	10
20	W600597	RQP12010H	10
25	W600598	RQP12510H	10
32	W600599	RQP13210H	10
40	W600600	RQP14010H	10

RQP Electronic Combined RCBO/MCB Device, 10kA 1Pole 240V, 30mA Type AC Curve C

Rating	Ref. NO.	1 Pole	Sensitivity
6	W600601	RQP10630H	30
10	W600602	RQP11030H	30
16	W600603	RQP11630H	30
20	W600604	RQP12030H	30
25	W600605	RQP12530H	30
32	W600606	RQP13230H	30
40	W600607	RQP14030H	30

① Option Type "A" Available

RCBO Type RQP

Plug-in RCBO IEC/EN 61009-1 10kA (240V/415V)


RQP Electronic Combined RCBO/MCB Device, 10kA 1Pole 240V, 100mA Type AC Curve C

Rating	Ref. NO.	1 Pole	Sensitivity
6	W600608	RQP106100H	100
10	W600609	RQP110100H	100
16	W600610	RQP116100H	100
20	W600611	RQP120100H	100
25	W600612	RQP125100H	100
32	W600613	RQP132100H	100
40	W600614	RQP140100H	100

RQP Electronic Combined RCBO/MCB Device, 10kA 1Pole 240V, 300mA Type AC Curve C

Rating	Ref. NO.	1 Pole	Sensitivity
6	W600615	RQP106300H	300
10	W600616	RQP110300H	300
16	W600617	RQP116300H	300
20	W600618	RQP120300H	300
25	W600619	RQP125300H	300
32	W600620	RQP132300H	300
40	W600621	RQP140300H	300

Dimensions

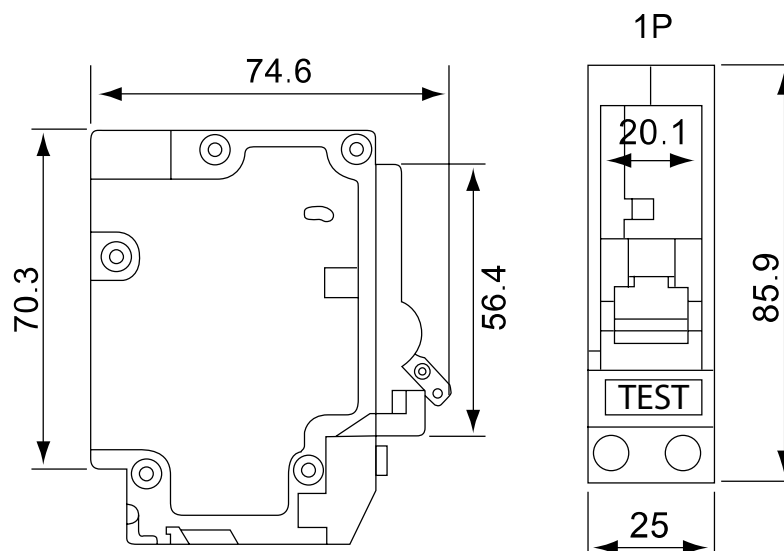

① Option Type "A" Available