

RCBO Type RQPB

Plug-in RCBO IEC/EN 61009-1 10kA (240V/415V)


Feature

RQPB-RCBOs are available with a breaking capacity of 10kA to IEC61009-1 The RCBO are calibrated to 40°C and can be supplied with 50°C ambient calibration Type AC.^①

Voltage 240/415V, Frequency 50/60Hz.

To order insert at the end of RCBO list number: RQPB10630H ref. FW600622.

Marking

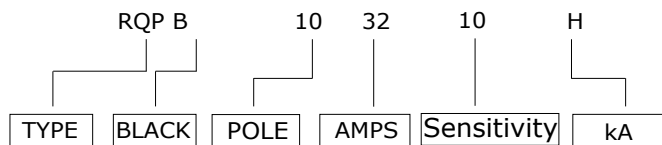

RQPB Electronic Combined RCBO/MCB Device, 10kA 1Pole 240V, 10mA Type AC Curve C

Rating	Ref.NO.	1 Pole	Sensitivity
6	W600622	RQPB10610H	10
10	W600623	RQPB11010H	10
16	W600624	RQPB11610H	10
20	W600625	RQPB12010H	10
25	W600626	RQPB12510H	10
32	W600627	RQPB13210H	10
40	W600628	RQPB14010H	10

RQPB Electronic Combined RCBO/MCB Device, 10kA 1Pole 240V, 30mA Type AC Curve C

Rating	Ref. NO.	1 Pole	Sensitivity
6	W600629	RQPB10630H	30
10	W600630	RQPB11030H	30
16	W600631	RQPB11630H	30
20	W600632	RQPB12030H	30
25	W600633	RQPB12530H	30
32	W600634	RQPB13230H	30
40	W600635	RQPB14030H	30

① Option Type "A" Available

RCBO Type RQPB

Plug-in RCBO IEC/EN 61009-1 10kA (240V/415V)


RQPB Electronic Combined RCBO/MCB Device, 10kA 1Pole 240V, 100mA Type AC Curve C

Rating	Ref. NO.	1 Pole	Sensitivity
6	W600636	RQPB106100H	100
10	W600637	RQPB110100H	100
16	W600638	RQPB116100H	100
20	W600639	RQPB120100H	100
25	W600640	RQPB125100H	100
32	W600641	RQPB132100H	100
40	W600642	RQPB140100H	100

RQPB Electronic Combined RCBO/MCB Device, 10kA 1Pole 240V, 300mA Type AC Curve C

Rating	Ref. NO.	1 Pole	Sensitivity
6	W600643	RQPB106300H	300
10	W600644	RQPB110300H	300
16	W600645	RQPB116300H	300
20	W600646	RQPB120300H	300
25	W600647	RQPB125300H	300
32	W600648	RQPB132300H	300
40	W600649	RQPB140300H	300

Dimensions

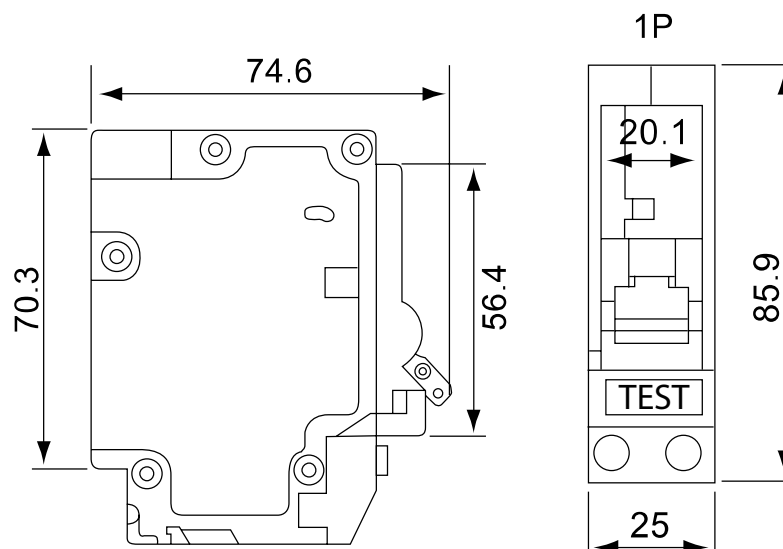

① Option Type "A" Available