

Frame Size K (500-630) Amperes




Product description:

Complying to IEC 60947-2,
Maximum continuous Ampere rating at 40°C Voltage 240/415V,
Frequency 50/60Hz

Ue Maximum	415V
Icu	25/36/50 kA
Ics	25/36/50 kA
Ui	1000V
Uimp	12kV

Dimension:	H	W	D	Weight Kgs.
3Pole	257	140	111.7	5.7
4Pole		185		7.5


Marking
CE

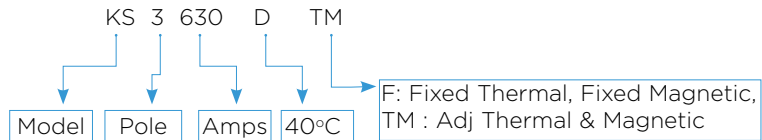

	KI - Frame MCCB 25kA AT 415V (Fixed Thermal & Magnetic) 40°C					
	25 kA	In (A)	3 pole		4 pole	
			Cat. No.	Ref.No.	Cat. No.	Ref.No.
		500A	KI3500DF	W611365	KI4500DF	W611367
630A	KI3630DF	W611366	KI4630DF	W611368		
	KS - Frame MCCB 36kA AT 415V (Fixed Thermal & Magnetic) 40°C					
	36 kA	In (A)	3 pole		4 pole	
			Cat. No.	Ref.No.	Cat. No.	Ref.No.
		500A	KS3500DF	W611369	KS4500DF	W611371
630A	KS3630DF	W611370	KS4630DF	W611372		
	KS - Frame MCCB 36kA AT 415V (Adjustable Thermal & Magnetic) 40°C					
	36 kA	In (A)	3 pole		4 pole	
			Cat. No.	Ref.No.	Cat. No.	Ref.No.
		500A	KS3500DTM	W611373	KS4500DTM	W611375
630A	KS3630DTM	W611374	KS4630DTM	W611376		
	KH - Frame MCCB 50kA AT 415V (Adjustable Thermal & Magnetic) 40°C					
	50 kA	In (A)	3 pole		4 pole	
			Cat. No.	Ref.No.	Cat. No.	Ref.No.
		500A	KH3500DTM	W611377	KH4500DTM	W611379
630A	KH3630DTM	W611378	KH4630DTM	W611380		
	KSY - Frame MCCB (Non-Automatic) 40°C					
	In (A)	3 pole		4 pole		
		Cat. No.	Ref.No.	Cat. No.	Ref.No.	
		500A	KSY3500D	W611381	KSY4500D	W611383
630A	KSY3630D	W611382	KSY4630D	W611384		

Frame Size K (500-630) Amperes

Drawing

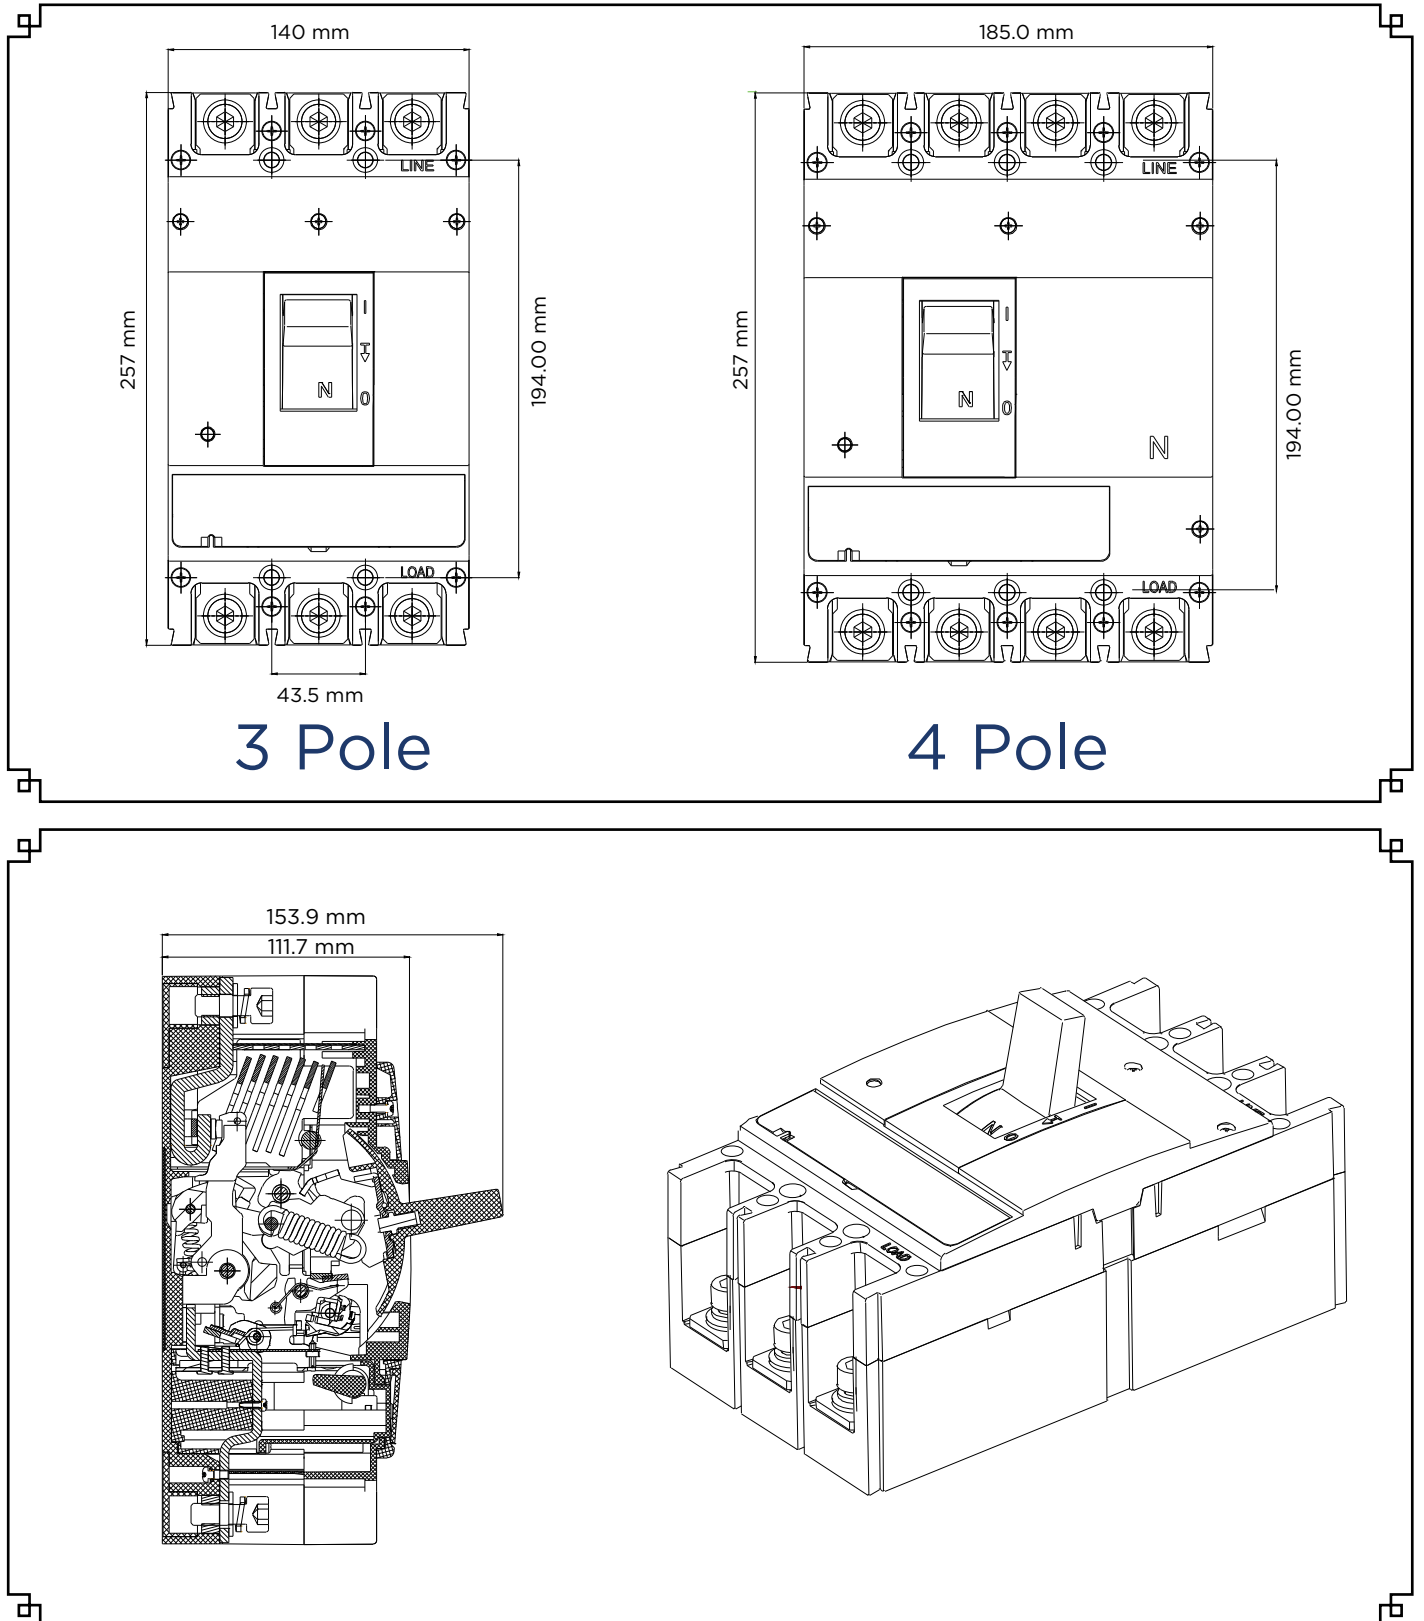

1
Moulded Case Circuit Breakers