

# Frame Size N (1000-1250) Amperes

1



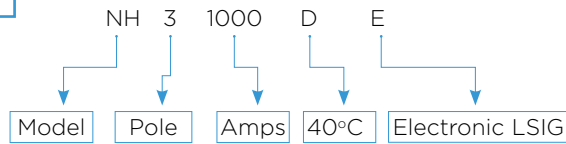
### Product description:


Complying to IEC 60947-2,  
 Maximum continuous Ampere rating at 40°C Voltage 240/415V,  
 Frequency 50/60Hz


Ue Maximum	415V
Icu	70 kA
Ics	50 kA
Ui	1000V
Uimp	12kV

Dimension:	H	W	D	Weight Kgs.
3Pole	406	210	140	21.3
4Pole		280		28.3

### Marking



	NH - Frame MCCB 70/50kA AT 415V (Adjustable - LSIG) 40°C					
	70/50 kA	In (A)	3 pole		4 pole	
			Cat. No.	Ref.No.	Cat. No.	Ref.No.
	1000A	NH31000ED	W611397	NH41000ED	W611400	
	1250A	NH31250ED	W611398	NH41250ED	W611401	

	NHY - Frame MCCB (Non-Automatic) 40°C					
		In (A)	3 pole		4 pole	
			Cat. No.	Ref.No.	Cat. No.	Ref.No.
	1000A	NHY31000D	W611403	NHY41000D	W611406	
	1250A	NHY31250D	W611404	NHY41250D	W611407	